

6

5



4

3



2

1




REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
E	13MAY2024	CMS/CLB	PRN: P2024-0502

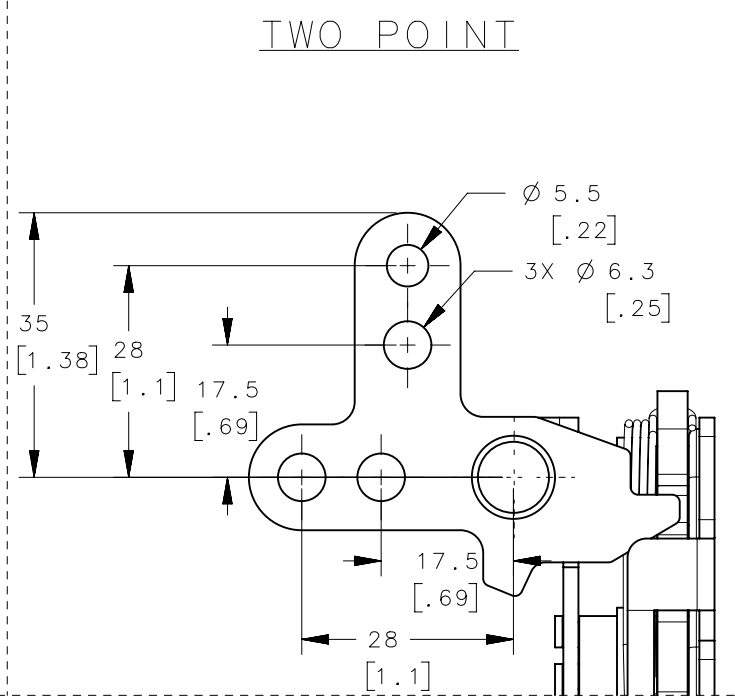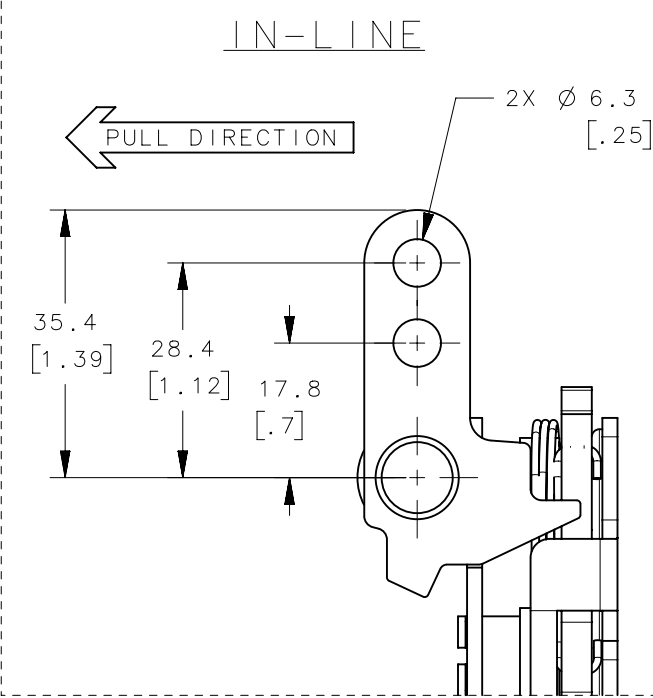

PANEL PREPARATION

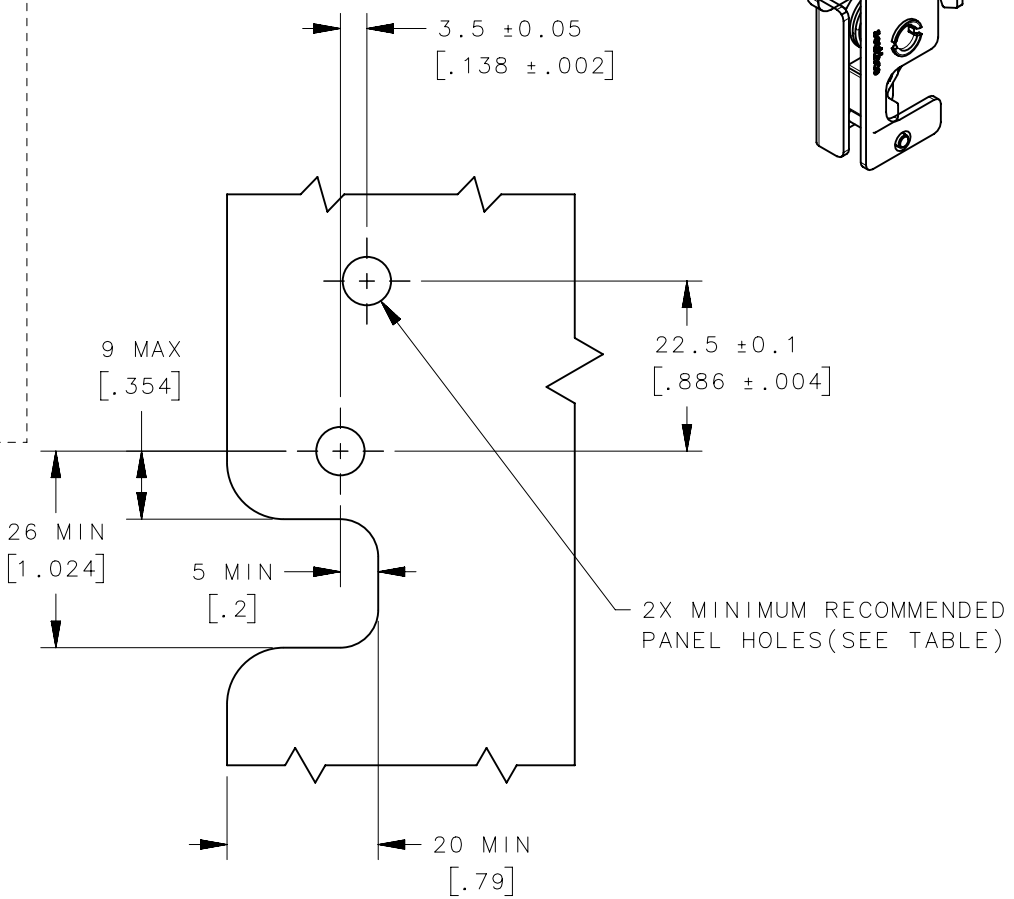

2X LATCH MOUNTING HOLES (SEE TABLE)

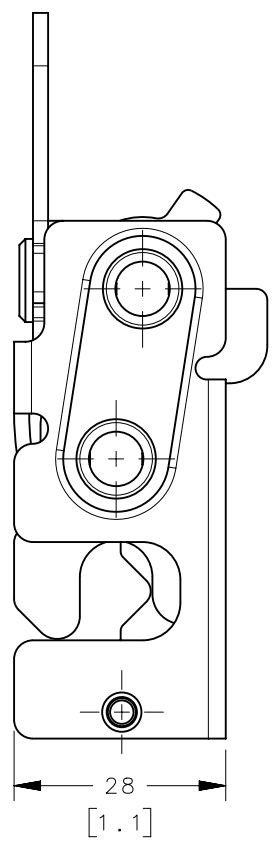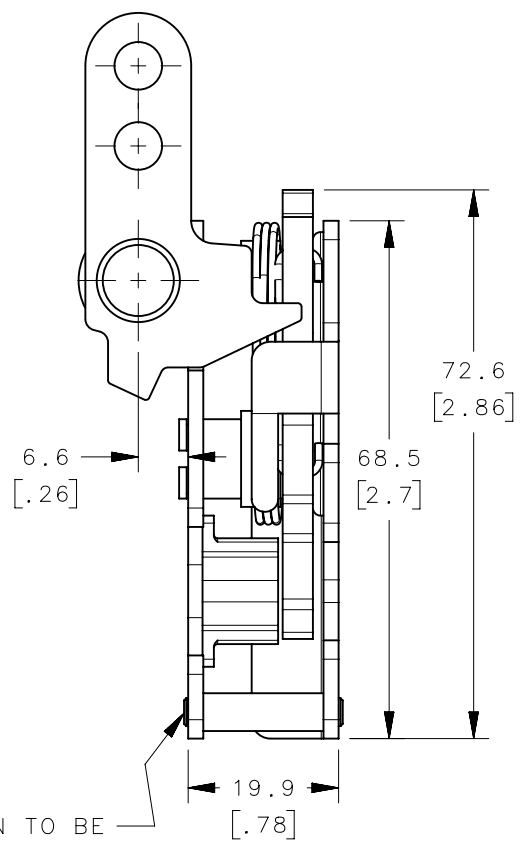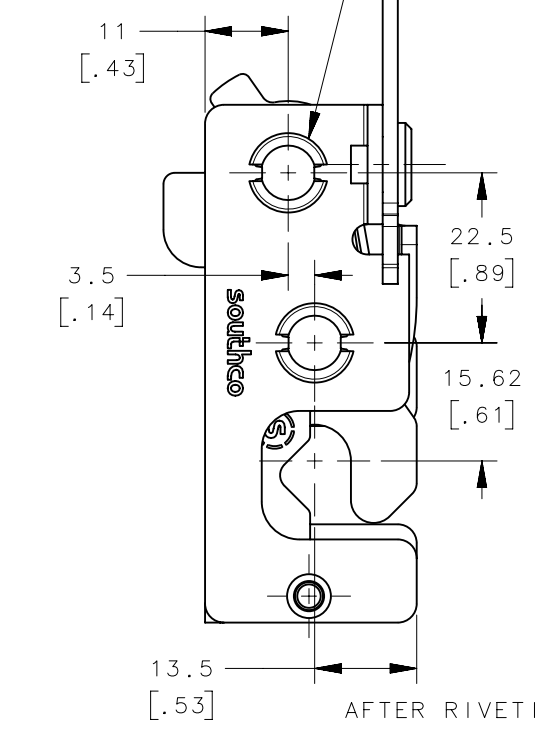

ASSEMBLY PART No.
R4-10-□□-□05-10

STAGE & ACTUATION

- 2 - SINGLE STAGE, LEFT HAND
- 4 - TWO-STAGE, LEFT HAND

MOUNTING STYLE

- 0 - Ø7.2 (.283) THRU
- 1 - 1/4-20 THREAD
- 2 - M6x1 THREAD

LEVER TYPE

- 1 - PERPENDICULAR
- 2 - IN-LINE
- 3 - TWO POINT

AFTER RIVETING, PIN TO BE RIVETED FLUSH WITH FRAMES

NOTES:

- A. MATERIAL AND FINISH:
 - HOUSING, LEVER, RIVET AND INTERNAL COMPONENTS: STEEL, ZINC PLATED, BRIGHT CHROMATE
 - PAWL AND TRIGGER: HARDENED STEEL, ZINC PLATED, BRIGHT CHROMATE.
 - SPRING: STEEL, PTFE COATING, BLACK.
- B. THESE DIMENSIONS REQUIRED FOR MOUNTING STRIKER BOLT.
- C. Ø6.3 (.25) LEVER HOLES USE OPTIONAL CABLE RETAINER R4-0-43922 SOLD SEPARATELY.

THIRD ANGLE PROJECTION	
MILLIMETERS [IN]	
TOLERANCES UNLESS OTHERWISE NOTED	
ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.	
PROPRIETARY ITEM	
EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	
PER ASME Y14.5M-2009	

southco [®]			
CONNECT · CREATE · INNOVATE			
DESCRIPTION R4 MINI ROTARY LATCH LEFT HAND - BSR INSERT			
SIZE B	SYSTEM NX	DWG NO. J-R4-10-5AL	
DRAWN BY CMG/DGJ	DATE 08MAY2014	SCALE 1:1	SHEET 1 OF 2

6

5


4

3


2

1

REVISION HISTORY			
REV	DATE	BY	DESCRIPTION
E	13MAY2024	CMS/CLB	PRN: P2024-0502

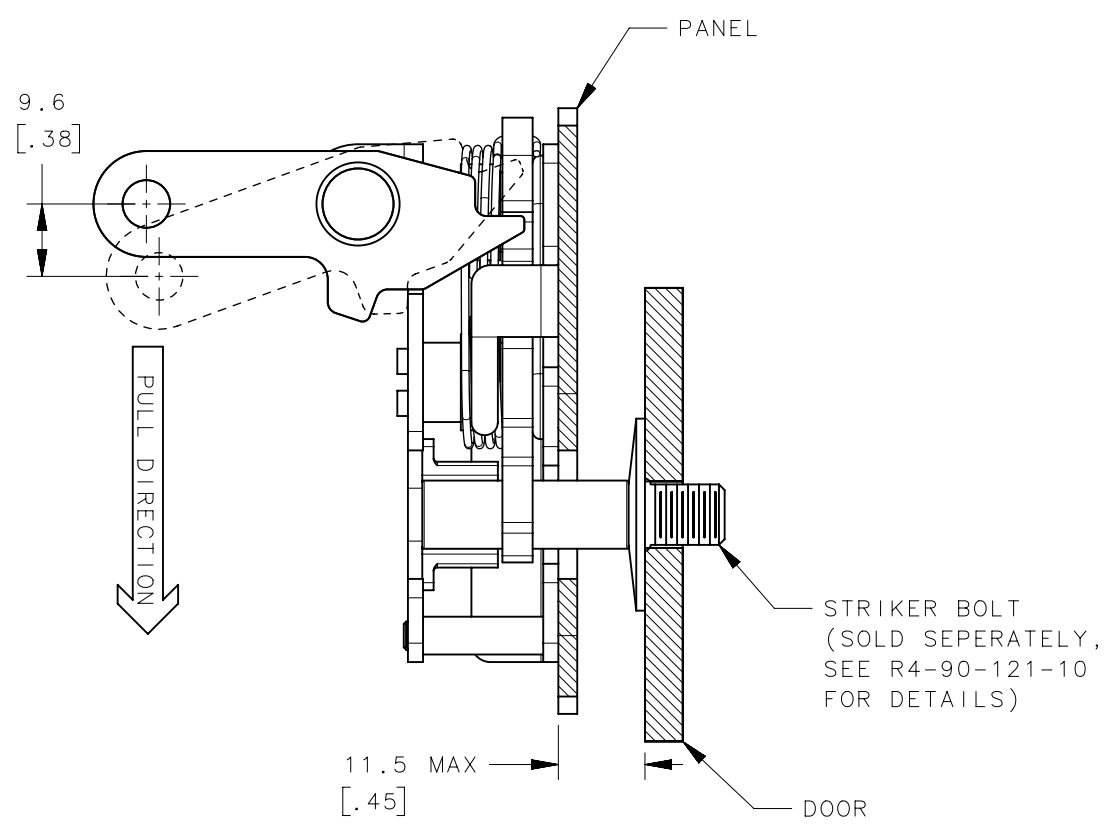


PRIMARY STAGE

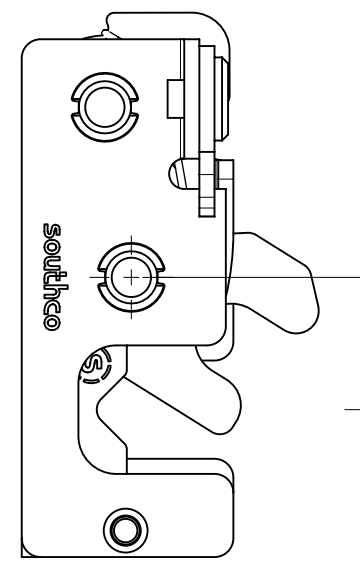


MISALIGNMENT VIEW
(SEE NOTE B)

17.5 ±0.3
[.689 ±.012]

SECONDARY STAGE

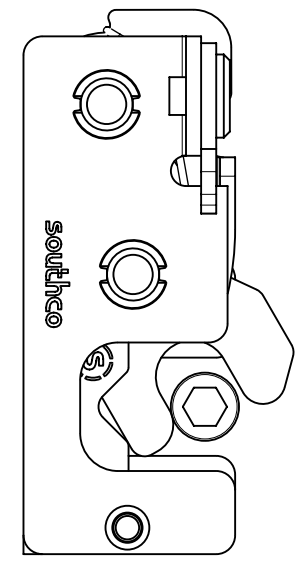

LATCHED STAGE

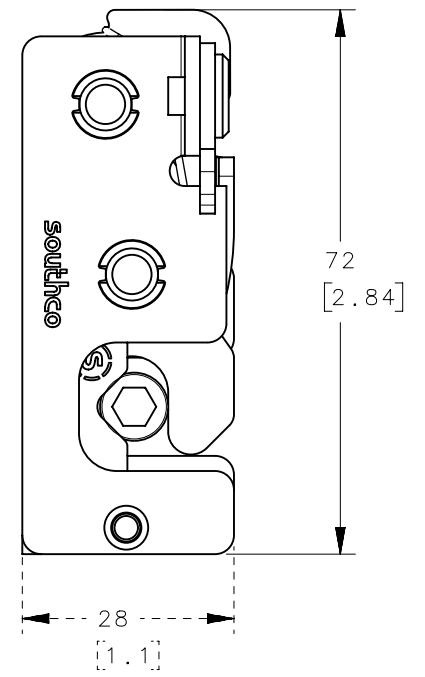

NOTES:

- A. THE TOLERANCE BETWEEN THE LATCH AND STRIKER BOLT ASSUMES A NON-RIGID DOOR INSTALLATION THAT WILL ALLOW THE DOOR TO MOVE INTO THE NOMINAL POSITION DURING LATCHING. RIGID DOORS MUST HAVE THE STRIKER INSTALLED PER THE PANEL PREPARATION RECOMMENDATION.
- B. THE MISALIGNMENT VIEW ASSUMES THE LATCH IS CONNECTED TO A PERFECTLY RIGID DOOR AND HINGE; THEREFORE, THERE IS NO DOOR AND/OR HINGE SLACK ASSOCIATED WITH THESE DIMENSIONS. THE MISALIGNMENT VIEW DOES NOT TAKE FLEXING OF THE STRIKER BOLT INTO ACCOUNT.

R4-10-X0-X05-10	Ø 7.2 THRU	Ø 7.2 [.299]
R4-10-X1-X05-10	1/2-20 THREAD	Ø 6.8 [.268]
R4-10-X2-X05-10	M6X1 THREAD	Ø 6.4 [.252]
PART NUMBER	MOUNTING STYLE	MINIMUM PANEL HOLE

THIRD ANGLE PROJECTION				southco [®] CONNECT • CREATE • INNOVATE	
MILLIMETERS [IN]					
TOLERANCES UNLESS OTHERWISE NOTED		DESCRIPTION			
ALL DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		R4 MINI ROTARY LATCH LEFT HAND - BSR INSERT			
PROPRIETARY ITEM EXCEPT FOR USES EXPRESSLY GRANTED IN WRITING, INFORMATION DISCLOSED HEREON IS CONFIDENTIAL AND ALL RIGHTS, PATENT AND OTHERWISE, ARE RESERVED BY SOUTHCO, INC.	PER ASME Y14.5M-2009	SIZE B	SYSTEM NX	DWG NO. J-R4-10-5AL	SCALE 1:1
		DRAWN BY CMG/DGJ	DATE 08MAY2014	SHEET 2 OF 2	