



REV	DATE	DESCRIPTION	DATE	DRAWN	CHKD	SCALE	DRAWING NUMBER
B	09APR2002	GDM	8-89	JJS		NTS	TD-E3-05-J
C	05AUG2024	SAK/DMS					



A PAPER SIZE

SOUTHCO PERFORMANCE GUIDELINES
 THE PERFORMANCE GUIDELINES SHOWN ON THIS PAGE ARE SUPPLIED AS A GENERAL GUIDE ONLY, AS CONDITIONS VARY WITH EACH APPLICATION AND METHOD OF INSTALLATION. STRENGTH DATA GIVEN IS FOR FAILURE OF THE PRODUCT OR FOR SUFFICIENT DEFORMATION TO MAKE PRODUCT INOPERABLE. NO SAFETY FACTOR HAS BEEN APPLIED IT IS RECOMMENDED THAT THE USER REQUEST A PRODUCT SAMPLE FOR TESTING TO DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE PURPOSE INTENDED AND USER'S PARTICULAR APPLICATION.

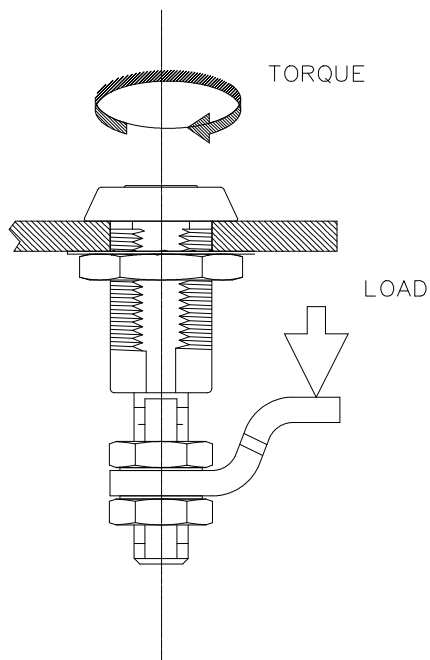

PART NUMBERS: E3-12-XX E3-15-XX **E3-119-XX**
 E3-13-XX E3-16-XX
 E3-14-XX E3-111-XX

COMPRESSIVE STRENGTH - Maximum WORKING LOAD ^①: 670 N / 150 LBS
 Average ULTIMATE LOAD ^②: 1500 N / 340 LBS

TORQUE LIMITS - To develop a compressive force on the pawl of 670 N / 150 lbs.; an operating torque of 7.9 N-m / 70 in.-lbs. was required to lock the fastener. ^③

- ① WORKING LOAD is the maximum force that the product will withstand without affecting the operation or appearance of the product.
- ② Average ULTIMATE LOAD causes failure of the product or sufficient deformation to make the product inoperable.
- ③ Overloading the fastener beyond these conditions is not recommended.