


GENERAL PERFORMANCE GUIDELINES

The information shown on this page was determined under one set of test conditions. Since conditions vary with each application, it is supplied as a general guide only. No safety factor has been applied. We recommend testing the product under actual application conditions to determine its suitability for intended use.

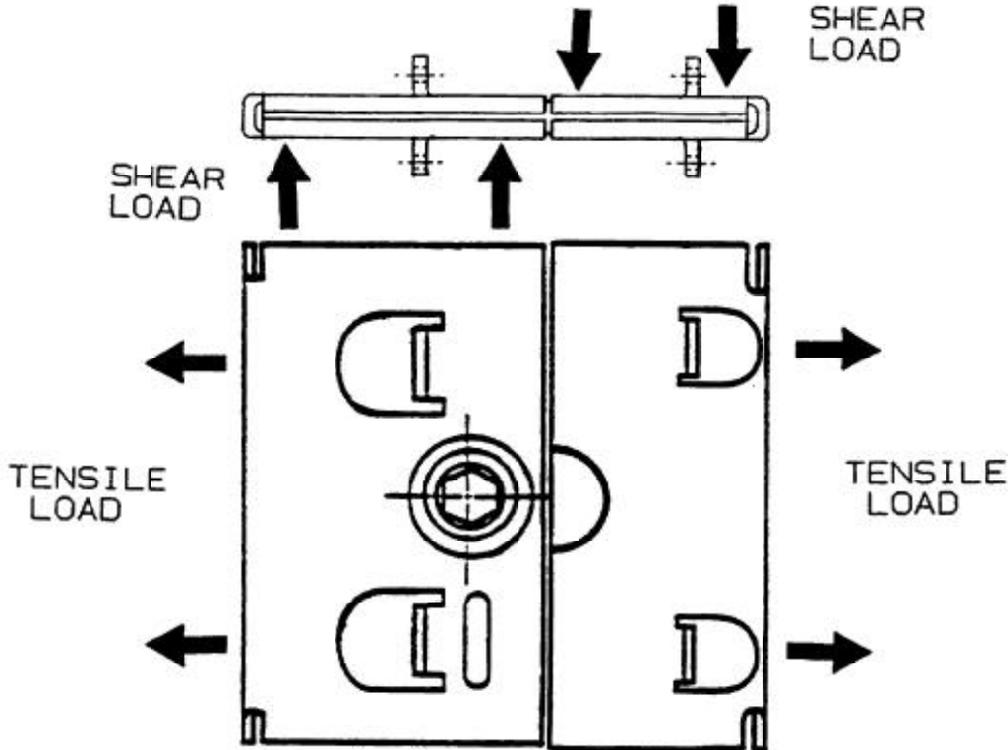

ITEM	PART NUMBERS	ULTIMATE TENSILE LOAD	ULTIMATE SHEAR LOAD
NO. 1 ROTO-LOCK	SHALLOW TAB 2-67-0259-02 2-67-0257-02	1400 LBS. 6200 N.	2000 LBS. 8900 N.
	DEEP TAB 2-67-0169-02 2-67-0160-02		
	NON-TAB 2-67-0055-02 2-67-0002-02		