

# **PK** Lock Cores SOUTHCO® Key-Choice System

- Lock cores ordered separately
- Greater flexibility in locking requirements

#### **Material and Finish**

Zinc alloy, chrome plated, black powder coated or with a stainless steel scalp



Key-Choice System

This icon indicates that a product is compatible with the *SOUTHCO®* Key-Choice System



The SOUTHCO® Key-Choice System features a common lock core that fits a wide range of SOUTHCO® latches.

This system allows for the independent selection of the correct latch for your application and the lock core required to manage the security of the end product. The guide below shows each of the latches in the SOUTHCO® Key-Choice System that can be purchased without the lock core installed.

Lock cores are sold separately which provides:

- The option to configure multiple latch styles with the same keying option
- The ability to configure the same latch style with multiple keying options
- Inventory reduction by managing multiple keying options with the lock core, while latches remain without the core installed until keying assignment is desired

#### Latches in the SOUTHCO® Key-Choice System

		1			
Compression	Cam	Push-to-close	Locks		
62 Lift and Turn Latch page 129  C2 Lever Latch page 138  C5 Sealed Lever Latch page 136	E5 Wing Style Latch page 163  E5 T-Handle Latch page 162  E5 L-Handle Latch page 160  E5 Flush Cup Wing Style page 164	R3-20 Baggage Door Latch page 274  AC-10 Actuator page 310  AC-15 Actuator page 312	CM-3 Sealed page 196  CM-6 Non-sealed page 196		



## **PK** Lock Cores

### SOUTHCO® Key-Choice System



#### **Lock Cores - Disc Tumbler**

Lock Core Part Number						
Keying	Key code	Bag qty	Shuttered stainless steel scalp	Non shuttered stainless steel scalp	Non shuttered black powder coated	Non shuttered chrome plated
KA	CH751	1	PK-65-42-13-KCH751	PK-132-13	PK-115-13	PK-116-13
KA	RS001	1	PK-65-42-13-RS001	PK-132-13-RS001	PK-29-15-13-RS001	PK-29-16-13-RS001
KD	10 CODES	10	PK-65-42-13-KD1010	PK-132-13-KD1010	PK-29-15-13-KD1010	PK-29-16-13-KD1010
KD	50 CODES	50	PK-65-42-13-KD1050	PK-132-13-KD1050	PK-29-15-13-KD1050	PK-29-16-13-KD1050
KD	125 CODES	125	PK-65-42-13-KD1125	PK-132-13-KD1125	PK-29-15-13-KD1125	PK-29-16-13-KD1125
MKKD	10 CODES	10	PK-65-42-13-MK1010	PK-132-13-MK1010	PK-29-15-13-MK1010	PK-29-16-13-MK1010
MKKD	50 CODES	50	PK-65-42-13-MK1050	PK-132-13-MK1050	PK-29-15-13-MK1050	PK-29-16-13-MK1050
MKKD	125 CODES	125	PK-65-42-13-MK1125	PK-132-13-MK1125	PK-29-15-13-MK1125	PK-29-16-13-MK1125

\*PK-65-42-13 is an updated version of the PK-39-72-13.

Keys	Part Number	
Master Key (1)	PK-24-01	
Control (Removal) Key (1)	PK-11-03	

Keys	Part Number		
CH751	PK-10-01		
RS001	PK-10-01-RS001		

#### **Lock Cores - Tool Operable**

	Lock Core Part Number					
Head Style	Phillips recess	Slotted	4 mm Hex recess	8 mm Hex recess	8 mm Square recess	Railway Standard recess
	•		•			
Chrome plated	PK-0-34027-01	PK-0-43489-01	PK-0-34323-01	PK-0-40374-01	PK-80-01	PK-0-45800-01
Black powder coated	PK-0-34027-50	PK-0-43489-50	PK-0-34323-50	PK-0-40374-50	PK-80-50	PK-0-45800-50

#### **Key code selection**

KA - Keyed Alike:

All lock cores are the same key code

**KD** - Keyed Differently:

Multiple key codes provided in a nonmaster key system


MKKD - Master Keyed, Keyed Differently:

Multiple key codes provided in a master key system

#### **Notes**

Part Number includes 1 lock core and 2 keys

#### Lock Core Installation for CM-3 and CM-6 only (see page 196)

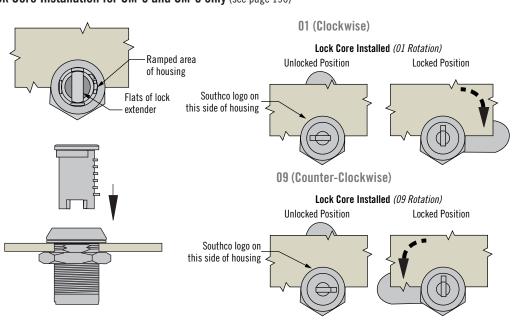

#### **Installation Notes**

- 1. Prepare panel and install latches shown on page 199.
- 2. Latch should be in unlatched position. The flats of the lock extender should be aligned with the flats on the housing.
- 3. Take a lock core and orient the brass wafers to the internal ramped area of the housing.

  Push lock core into housing until it stops.
- 4. Insert key into lock core and turn to verify lock core is fully seated and operating properly.
- 5. Install cam.

